


XPEL ULTIMATE PLUS 10™ is a high performance, ultra-thick, self-adhesive, clear-coated aliphatic polyurethane film designed to protect automotive paint, and other surfaces, from harmful effects of stone chips and abrasion. XPEL ULTIMATE PLUS 10™ is a very low surface energy film designed to resist staining and offers superior environmental resistance and gloss retention. The clear coat employs special elastomeric polymers that allow scratches in the surface to “heal” over time, eliminating the need for frequent polishing to maintain a just installed appearance. XPEL ULTIMATE PLUS 10™ is coated with ultra-clear high performance acrylic adhesive which has excellent adhesion on a broad range of surfaces, while resisting disturbances during installation. This high performance acrylic adhesive is formulated to resist delamination, it will not damage paint or leave behind residue upon removal post installation.

## PRODUCT CONSTRUCTION

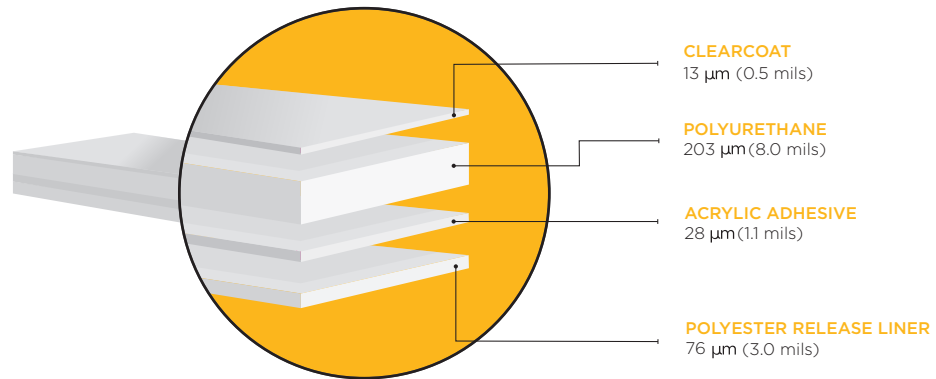

**NOMINAL THICKNESS W/O RELEASE LINER**  
193 µm (9.6 mils) +/- 10%

GENERAL CHARACTERISTICS			
PROPERTIES	TYPICAL VALUES	TESTING CONDITIONS	STANDARDS USED
Gloss	>95 GU	85 Degree	ISO 2813

## TARGET APPLICATIONS

Clear gloss polyurethane for stone chip protection, high wear, and abrasion in the automotive, motorcycle, RV, powersports, bicycle, aircraft, and other transportation markets.



Partial Hood and Fender



Bumper

Notice: The representations of performance and suitability for use contained in this Technical Data Sheet are meant only as a guide. Since only the user is aware of the specific conditions in which the product is to be used, it is the user's responsibility to determine whether the product is suitable for that intended use.

## TARGET APPLICATIONS

Clear gloss polyurethane for stone chip protection, high wear, and abrasion in the automotive, motorcycle, RV, powersports, bicycle, aircraft, and other transportation markets.



Rocker Panels



Trunk Ledge



Door Edge



A-Pillars/Roofline



[www.xpel.com](http://www.xpel.com)

Toll Free: (800) 447-9928  
International: +1 (210) 678-3700  
Fax: (210) 678-3701

Notice: The representations of performance and suitability for use contained in this Technical Data Sheet are meant only as a guide. Since only the user is aware of the specific conditions in which the product is to be used, it is the user's responsibility to determine whether the product is suitable for that intended use.